



invenso
LUCE D'AUTORE



Sequenza Mini

SM706

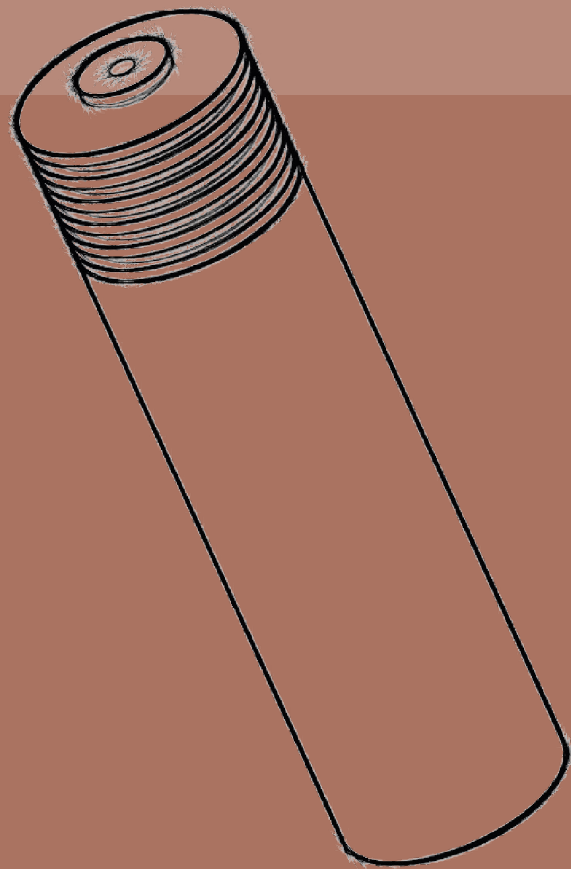


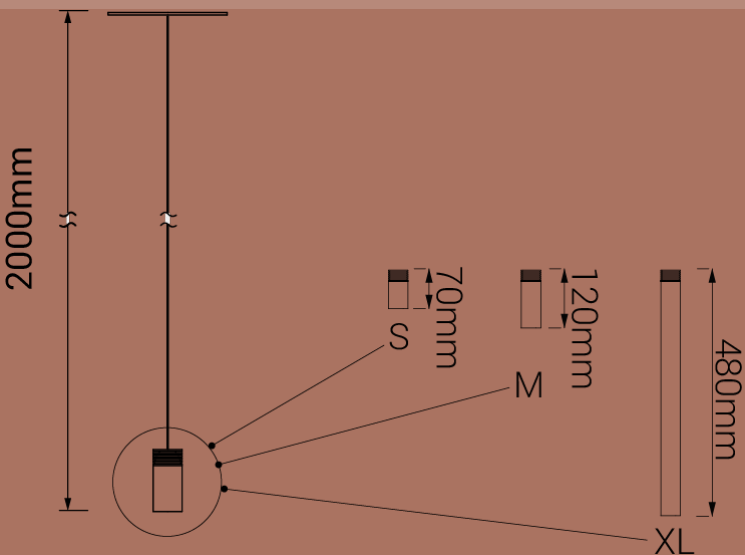


Sequenza Mini

SM706

Wall attachment
includes 2 single cleat E012

LED: 12x2 W | 350 mA | 3000K | CRI 90
3984 lm | 166 lm/W | > 50.000h | T 55°C
ALIMENTATORE: 350mA | 220/240V | 50/60 Hz
Dimmer elettronico: 0/10-1-10-PUSH



Finishes

	OT: Brushed brass		NI: Nickel
	BR: Bronze		NE: Black
	RA: Copper		

Diffuser

99: Full vitrified PMMA

Accessories

Electronic dimmer: DALI

A++

LED

IP20

